




LAULED

Pendant industrial LED lighting IP65

SPECIFICATION

Housing: Pressure die-cast aluminum alloy with polyester powder paint
 Beam angles: 45°, 70°, 90°, 110°
 Housing color: Gray, white, RAL
 IES protection classes: Class I
 Color temperature, K: 4000K - 6000K
 Input voltage, V: 220V
 Overvoltage protection: >6.5KV
 Ingress Protection Rating, IP: IP65
 Color rendering index, Ra: >75
 Lighting efficiency: >160 lm/W
 Power factor (PF): >0.9
 Operating temperature: -25°C ~ +50°C, 10%-95% RH
 Guaranteed lifetime, hours: 50 000h

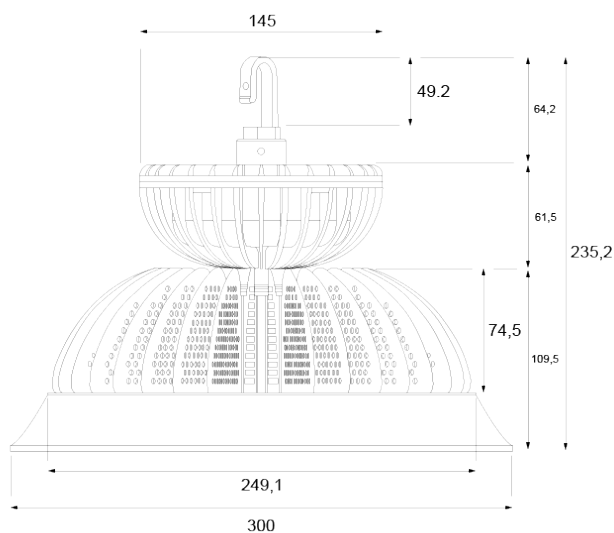

Aticle	Name	Power, W	Dimensions, mm	Luminous efficiency, lm/W	Color temperature, K	Beam angle, degrees	Weight, kg
79509001	LAULED 90W 220V non-dim IP65	90W	d 300x205	160	4000K, 5000K, 6000K	110°	3,5
79509011	LAULED 90W 220V dimm PWM or 1-10V IP65	90W	d 300x205	160	4000K, 5000K, 6000K	110°	3,5
79511001	LAULED 110W 220V non-dim IP65	110W	d 300x205	160	4000K, 5000K, 6000K	110°	3,5
79511011	LAULED 110W 220V dimm PWM or 1-10V IP65	110W	d 300x205	160	4000K, 5000K, 6000K	110°	3,5
79513001	LAULED 130W 220V non-dim IP65	130W	d 300x235	160	4000K, 5000K, 6000K	110°	3,5
79513011	LAULED 130W 220V dimm PWM or 1-10V IP65	130W	d 300x235	160	4000K, 5000K, 6000K	110°	3,5
79515001	LAULED 150W 220V non-dim IP65	150W	d 300x235	160	4000K, 5000K, 6000K	110°	3,5
79515011	LAULED 150W 220V dimm PWM or 1-10V IP65	150W	d 300x235	160	4000K, 5000K, 6000K	110°	3,5
400050	LAULED 45°/70°/90° aluminum reflector	-	388x130/ 435x125	-	-	45°, 70°, 90°	-
400055	LAULED mat diffuser for the aluminum reflector	-	388x130/ 435x125/ 360x120	-	-	-	-
400060	LAULED PC reflector	-	360x120	-	-	-	-
400065	LAULED protective grill grid	-	253x60	-	-	-	-
400080	LAULED mounting clamp	-	-	-	-	-	-
400090	LAULED motion sensor	-	-	-	-	-	-
400095	LAULED converter DALI-PWM	-	-	-	-	-	-