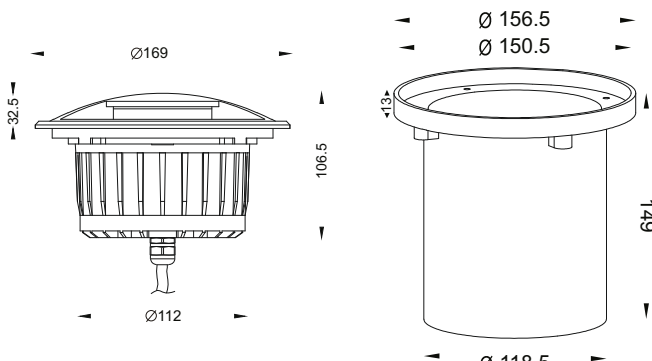
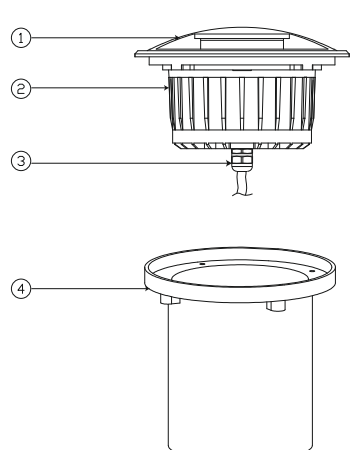



Zibo L


USER MANUAL

OUTLINE DIMENSION	BOM
 <p>Unit: mm</p>	 <ul style="list-style-type: none"> ① Front cover ② Housing ③ Cable gland ④ Mounting sleeve
<p>Note: The drawing was show a general introduction to this description. When the discrepancy between the actual product and drawing, please all to the actual products.</p>	
<div style="display: flex; align-items: flex-start;"> <div style="margin-right: 20px;">  </div> <div> <p>1.The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.</p> <p>2. No supplied water-proof box, installation should be advised by qualified professional.</p> <p>3.The external flexible cable can not be replaced. If the cable is damaged, the luminaire should be discarded.</p> </div> </div>	

1. FEATURES

- This product is a middle power LED inground light.
- The standard color temperature of warm white is in range 2700-3200k.
- The standard input voltage is 220-240VAC. When you install the product, please check the data label on the product and on the wire.
- When installation, always work with technician or install by technician.
- The main material of this product is aluminum, surface coating is only suitable for natural environment, don't install this product near the sea water or in the environment which is high salty or high acid.
- This is IP67 grade product, don't put fixture into water.
- Applicable environment temperature: $-20^{\circ}\text{C} < \text{fixture} < +40^{\circ}\text{C}$

2. INSTALLATION

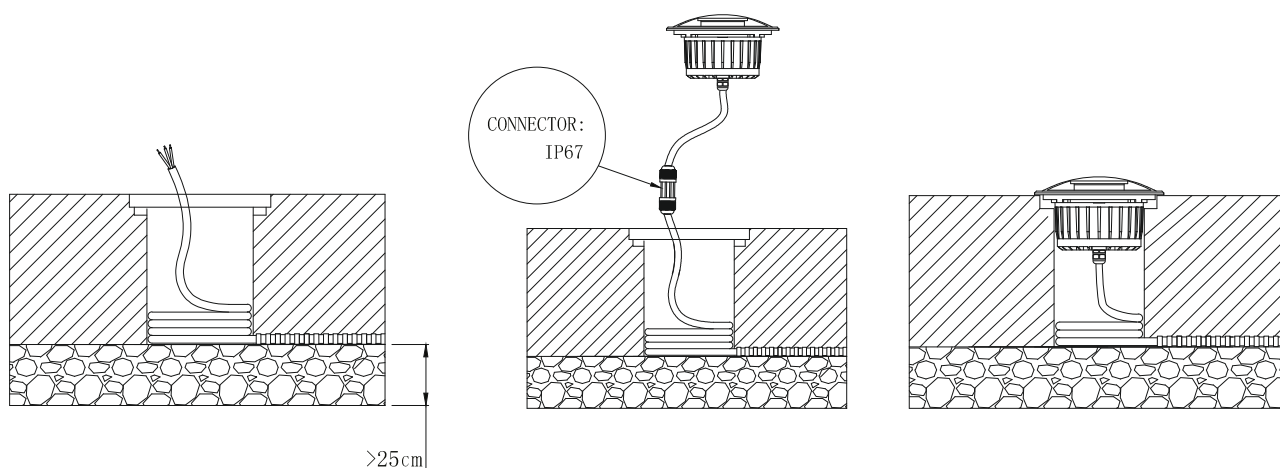


Install the sleeves into the ground, the top side should on the same level with the ground surface, cable need to go through the sleeve.

Connect the cable with the light.
*keep enough length for maintain.

Put the light fixture into the sleeve.


Note: The thickness of the gravel must ticker than 25cm.

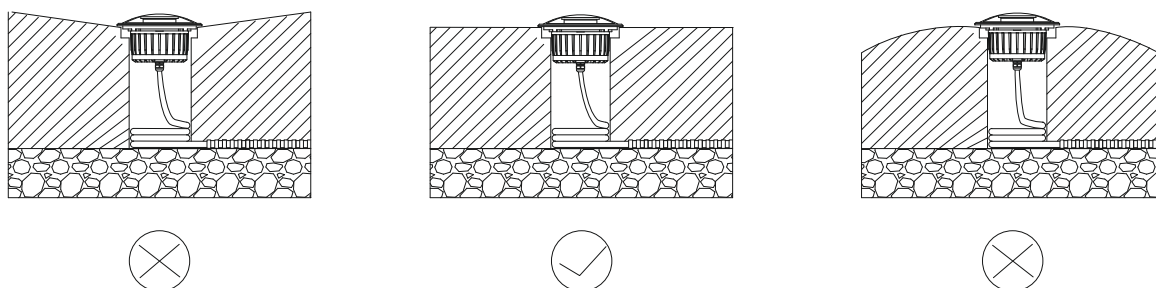

3. WIRING DIAGRAM

3.1: High voltage single color fitting: refer to the following recommended wiring method.

Example of wiring:

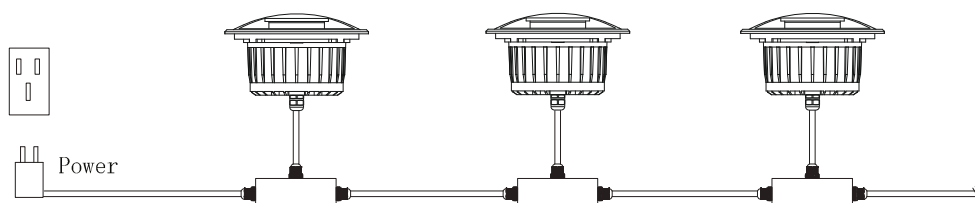

220-240VAC: circuit of product

